

Interactive Displays

Plasma Based System


Navigate
Collaborate
Captive



Electronic Pen Turns into a Fully Functional PC Mouse



Optional Stand and PC Tray



Compatible with VTC (Video Teleconferencing)

Seamlessly drive the work process from individual thought and space to collaborative with PolyVision's Interactive Plasma Display System (IPD).

The More the Merrier...


...except when you're huddled around a PC. Eliminate the group huddle and take your "I" (individual) space to a "we" (group) space with PolyVision's Interactive Plasma Display. A flat screen plasma monitor that works as an interactive computer screen, IPD makes collaboration across time zones or within the same room an impressive, and huddle-eliminating, experience.

Make it Clear, Crystal Clear

With the ability to stand in front of a room unencumbered by projectors, presenters command attention. Coupled with IPD's exceptional clarity and precision cursor tracking, participants can follow every action whether they're in the room or in a remote location, so your message is always crystal clear.

Interactive Plasma Display:
Collaboration at its finest.



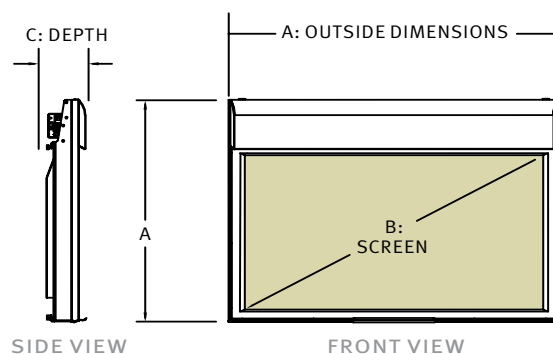

IPD Series Interactive Plasma Display System	IDP 9350*
Dimension A (HxW)	35.69"x 48.54" (1100mm x 1230mm)
Dimension B (Screen)	50.0" (1270mm)
Dimension C (Depth)	5.87" (150mm)
Resolution	8000 x 8000
Aspect Ratio	16:9
Weight	104 lbs. (47.17kg)

Power Requirements

AC 100-120V, 50-60 Hz, 4W

Certification

UL, CE, CSA, FCC Class A, CFR1040

Software Features

- Transfer images via drag & drop, clipboard, or file export
- Anti-aliased markup including highlighters
- Real-time playback
- Multiple monitor support
- Save images in JPG, BMP, TIFF, WMF, HTM, PDF, PCT, MacPaint, PSD, PNG, Quicktime Image, and TGA

Warranty

- Two-year limited warranty on wrap-around plasma display kit
- One year warranty on plasma display screen
- Extended warranties available

Options

- 9-pin serial to USB adapter
- Wall mount bracket
- Mobile stand
- Room-blasting, infrared wireless computer connection
- PenOffice™ Handwriting Recognition Software

*Pioneer Model PDP-503CMX Plasma and wrap-around plasma display kit sold as one unit. Interactive wrap-around plasma display kits also sold separately to fit various NEC and Pioneer plasmas units. Call 800.620.POLY or visit www.polyvision.com for availability.

Computer Requirements

Microsoft Windows®:

Pentium® processor, 32 MB RAM
Windows 98, NT, 2000, ME, XP, Tablet XP
One available serial port with 9-pin D-type connector

Apple Macintosh®:

PowerBook®, G3, G4, iBook®, iMac™, eMac™
32MB available RAM
Available serial port or use optional 9-pin serial to adapter
Mac OS version 8, 9, or X

Accessories (Included)

- 12' (3.65m) 9-pin male to 9-pin female cable
- 8' (2.44m) power cord
- Electronic pen with wireless, infrared operation, laser-scannable tip, & two mouse buttons on barrel (includes a lithium 3.6V, 1/2 AA battery with expected life of 1 year)

Authorized PolyVision Dealer

PolyVision Corporation
1.800.620.POLY
info@polyvision.com
www.polyvision.com

POLYVISION
A Steelcase Company